

## Implementation Of Kano Model in Graphic Design of Architectural Environment Art

Xin Cheng\*

\*College of Mechanical and Electrical Engineering, Guilin Institute of Information Technology, China, 541004

\*Email Id: 382692846@qq.com

**Abstract:** Industrial, landscape, graphic, and interior designers are all part of environmental design, which aims to improve the aesthetics of a given location by combining elements from these and other fields. When done right, ecological design can boost a location's practicality, influence, and impact on those who come. The central focus of this endeavour is the implementation of the Kano model (KM) in the realm of architectural environmental art visual design. The Kano model provides a satisfaction-based classification system based on five quality factors: one-dimensional effectiveness, mandatory performance, neutral quality, alluring quality, and reversing quality. Using the Kano model, this investigation seeks to identify the most crucial aspects of graphic design that architects and designers should consider when crafting works of art for the built environment. This research first takes a close look at KM and its uses in graphic design, before moving on to assess the model's potential in the field of architectural environment art. Based on the study's findings, architects and designers can enhance satisfaction and create exceptional graphic design for architectural environments by focused on these key graphic design aspects.

**Keywords:** Architecture Environment Design, Industrial Style, Interactive Graphic Style, Kano Model (KM), Green Construction

### 1. Introduction

Architectural environment art is created in large part through graphic design. In order to develop aesthetically pleasing and useful materials for communication for architectural projects, it entails utilizing visual components like typography, colour, photographs, and other design features. Graphic design aids in communicating the architect's or designer's vision and intention to the intended audience when it comes to architectural environment art [1, 2]. Architectural environment art graphic designs use a range of methods and resources to provide visually stimulating depictions of architecture concepts and ideas. These could include 3D modelling applications, digital rendering tools, and conventional painting and drawing methods. Usually, a blend of these methods yields a unified and strikingly beautiful depiction of the building undertaking [3].

In architectural environment art, graphic design has a practical use in addition to its aesthetic appeal. It facilitates the dissemination of crucial project details, including plans for floors, elevations, and site plans, to customers, stakeholders, and the general public [4]. It is also essential to the project's marketing and promotion, drawing in possible customers and investors. All things considered, graphic design of architecture environment art is an essential step in the process of designing buildings since it aids in visually stimulating and effectively realizing the architect's or designer's concept [5, 6]. In order to analyse the crucial element of the graphic architectural design, we present KM in this study. The Kano model is a framework that helps businesses and organizations understand and prioritize customer needs and expectations. In the context of graphic design for architectural environment art, the Kano model can be used to identify the features and design elements that are most important to stakeholders.

The KM has been combined with a number of Multi-criterion Decision Making (MCDM) methodologies, the Taguchi method, Kansei engineering, and more ways to determine the relative weights of the criterion [7]. Authors of [8] suggested design concepts based on three user skill levels, investigate the sensory level visual depiction of cultural aspects, look for suitable emotion mapping techniques, and enhance user experience. Users provided the suggested [9] virtual reality (VR) system a generally good in regards to realism, sense of scale, and brightness,

which is congruent using the outcomes of research using the immersive virtual environment (IVE) for subjective assessments of daylight. An innovative interactive method to gather and display subjective user daylighting choices in a virtual museum setting at two different times of the day. In comparison to the more conventional method of environment recognition [10], virtual reality (VR) offers a significantly better level of environmental validity by applying a high level of realism (presence) through 360-degree movies or panoramas (e.g., drawings, maps, renderings, and videos). In accordance with distant education methods [11], the chosen technology tools, digital sites, arrangements used in architectural representation approaches, and technological devices are gradually replacing conventional modes of representation and communication. Use the Scenic Beauty Estimation Technique [12] to analyse the scenic beauty of an urban setting, paying special attention to how various variable sets may be used to forecast preferences as well as how these preferences might converge across various user and interest groups. The fact that both studies looked at rating dependability is also interesting. It presents a psychophysical method for gauging public preferences in order to create statistical models for forecasting and tracking the visual quality of forests and other environments.

In [13], they should present a unique multi-modal approach that makes use of both textual and visual analysis methods to calculate a location's imageability rating. A deep learning model for picture sentiment analysis has also been built to offer more details on the emotions that urban environments generate in occupants. Architectural designers with a desire to comprehend the behaviour of the ultimate end user should apply evidence-based design (EBD) methods [14]. Human well-being is significantly influenced by the place, time, and level of exposure to a certain environment. The purpose of the study [15] was to build and evaluate a machine learning technique that incorporates using three distinct algorithms for machine learning, the urban visible environment can be automatically and widely analysed. Research [16] carried out more thorough and systematic simulations of the procedures, aptitudes, and molecular components of "building" techniques of various numerous traps. The simulation findings were then systematically analysed.

In the study [17], they examined LEED-certified GB IEQ residences and concluded that the sunlight and sound qualities might use enhancement. The most important factors were the heating, AQ, moisture, hygiene, and sight. The findings [18] revealed that while a significant portion of occupants believed the air in their workstations was excessively chilly, the inhabitants showed overall satisfaction with the interior environment. The carbon dioxide level was mostly greater as well. In a warm climatic zone in China, 20 green office architecture fared better in thermal conditions, user heat gain, and indoor air. A survey study was carried out by Media [19] for an Indonesian green office building. Just 51% of the building's inhabitants believed it matched the criteria for green architecture, and 21% of them thought the office building was "non-green," showing that the GB's efficiency needed to be improved. It was discovered [20] that discrepancies between LEED-certified architecture and non-certified architecture were considerably influenced by non-biological characteristics including office kinds, spatial layouts, age and gender. It was revealed [21] that residents of green architecture perceive the interior environment more favourably and have fewer "sub-health" symptoms than residents of conventional structures.

One potential research problem in graphic design for architectural environment art understands the preferences of different stakeholders, such as architects, clients, and end-users, and how to balance their competing needs and expectations. The Kano model can help address this problem by categorizing design features into five categories, and it can help designers to better understand customer requirements and prioritize their design decisions accordingly in the context of graphic design of architectural environment art.

## 2. Materials and Methods

This section describes an empirical study utilizing KM to establish the relationship between satisfaction and quality of graphical design in buildings and how people experience it. This article evaluates the quality standards for graphical design in architecture to support future graphical design and development by using a questionnaire based on the KM. Below is a description of the experimental research design.

## 2.1 Data Sample

At Taiwan's Midland University of Technology, the Kano questionnaire survey was carried out. Twenty-seven males and 38 females between the age of 18 to 39 developed the 62 people in the research. They were chosen because of the following factors: The subjects showed a high level of enthusiasm to engage in activities, and (a) every subject was selected from the university's design department.

## 2.2 Kano Model

The KM is pioneering a new two-dimensional approach to defining quality. Understanding how consumers evaluate and perceive quality qualities is facilitated by this approach, which acknowledges that originally invisible concepts about quality may be made apparent. Figure 1 depicts the representation of the KM model. The KM has five benefits when used in building construction.

- The model determines the parameters that have the most impact on satisfaction in order to describe architectural requirements.
- Enables significant assistance in sacrifice scenarios during the architectural development phase.
- Given that "must-be, one-dimensional" and aesthetic criteria differ in utility requirements among various consumer segments, the model allows customer-tailored approaches to unique challenges to be noticed, ensuring optimal satisfaction.
- A wide variety of chances for difference are widened by finding and achieving aesthetic requirements.

It is used to demonstrate the value of specific product aspects to satisfaction, and as a result, it produces the best precondition for activities that are process-oriented in their product development. Because of these factors, in order to attract people, a building has to consistently create a unique and new design in its architecture.

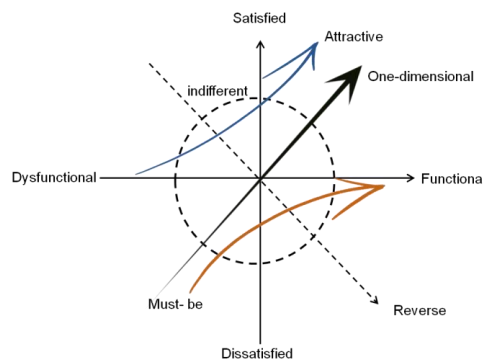


Figure 1: Representation Of KM Model

The theory of appealing quality is an explanation for the connection between the level of sufficiency and the level of user satisfaction. This relationship is explained by referring to a quality characteristic, which may be placed into one of five different categories that define perceived quality.

- **Attractive quality:** When properly achieved, attractive qualities contribute to astonishment and pleasure, but when unsatisfied, they do not lead to dissatisfaction. In other words, when correctly achieved, they offer satisfaction.
- **One-dimensional quality:** Satisfaction results from one-dimensional quality traits when they are satisfied, while dissatisfaction results when they are not satisfied.

- **Must-be quality:** When they meet the criteria, must-be quality characteristics aren't even noticed, but when they aren't, they lead to feelings of dissatisfaction; these characteristics might be reflected in the composition of the substance itself.
- **Indifferent quality:** The term "indifferent quality" refers to features of a graphical service that users do not find to have the possible or impossible impact on their interactions with graphics.
- **Reverse quality:** The term "reverse quality" denotes a scenario in which the quality of the design requires expectations, but the ultimate result is lower levels of consumer satisfaction. The increased levels of consumer satisfaction occur when the graphic design quality falls below requirements.

The assessment table of the KM may be seen in Table 1, and the variable description used for the KM model is indicated in Table 2. The Kano assessment table enables one to compute the quality characteristics in 6 various categories; the highest value is denoted by the aggregate amount of quality attributes. In addition, the individual's satisfaction coefficient that was determined via the use of the questionnaire may be examined in such a way as to determine whether or not adequate or insufficient quality has an impact on level of satisfaction experienced by people. Findings of the questionnaire also reflect "the degree of dissatisfaction of satisfaction" and "the degree of dissatisfaction" of each characteristic using an equation (1) and (2), respectively.

$$(B + P)/(B + P + N + J) \quad (1)$$

$$-1(P + N)/(B + P + N + J) \quad (2)$$

Table 1: Kano Evaluation Table

Requirements	Dysfunctional					
Functional		Dislike	live	Neutral	Must	Like
	Dislike	R	S	S	S	S
	live	N	J	J	J	S
	Neutral	N	J	J	J	S
	Must be	N	J	J	J	S
	Like	P	B	B	B	R

Table 2: Variable Description

Variable	Description
B	Attractive
N	must be
P	one dimensional
J	indifferent
S	reverse
R	questionable

### 2.3 Qualitative Research

The analysis of graphical quality focused on both positive and negative quality. Consider that 13 quality criteria were categorized according to the notion of attractive quality. According to the findings of the Kano survey, which are presented in Table 1, one outcome indicates the sum of how many measures reduce into a particular condition according to the assessment table, with the state being classified as either "attractive one-dimensional, must-be, indifferent, or reverse."

The analysis was narrowed down at this stage. Using the Kano analysis, the quality result might be broken down into positive and negative categories for each questionnaire element. Next, the five quality characteristics of each aspect of graphic design in architecture were determined by quantifying the amount of frequency with which each attribute was mentioned. Attribute quality is largely dependent on element quality. Figure 2 depicts the Identifying attributes of the questionnaire.

The factors of satisfaction and dissatisfaction were calculated for each aspect of graphic design in architecture based on four characteristics “(attractive quality, must-be quality, one-dimensional quality, and indifferent quality)” using the equation (1) and (2) formulas. Finally, a conclusion was offered based on the analysis's findings.

Like	Must be	Neutral	Live with	Dislike
<ul style="list-style-type: none"> <li>When an element of graphic design in architecture is sufficient you feel "like"</li> </ul>	<ul style="list-style-type: none"> <li>When an element of graphic design in architecture is sufficient you feel "must be"</li> </ul>	<ul style="list-style-type: none"> <li>When an element of graphic design in architecture is sufficient or not you feel "neutral"</li> </ul>	<ul style="list-style-type: none"> <li>When an element of graphic design in architecture is sufficient or you feel "live with"</li> </ul>	<ul style="list-style-type: none"> <li>When an element is sufficient, you feel "dislike"</li> </ul>

Figure 2: Identifying Attributes of The Questionnaire

### Statistical Analysis

The student's t-test is a statistical technique used to determine if the means of two groups significantly differ, often used in data with regular distribution. It includes various types such as independent samples and paired samples t-tests. The distance between a mean value taken from the sample and the distribution mean, represented by unit of the standard error,  $\mu$  is an indication of t-statistics for a single-sample test ( $S.E = \frac{S.D}{\sqrt{m}}$ ).

$$s = \frac{\text{sample mean} - \mu}{S.E.} \quad (3)$$

The statistical significance of the measured value of  $s$  is determined by comparing it with the  $t$  distribution. The tabulated  $s$  values define the area of rejection, which is indicated by the ends of the  $s$  distribution. The mean of the single sample and the two-tailed test are then used to estimate an interval of confidence ( $CI$ ) on the actual average in the population.

$$CI = (\text{sample's mean}) \pm s(S.E.) \quad (4)$$

$$CI = (\text{sample's mean}) + s(S.E.) \quad (5)$$

$$CI = (\text{sample's mean}) - s(S.E.) \quad (6)$$

The combined t-test may be applied in the statistical computations for a two-sample scenario. Given is the t-statistics value.

$$s = \frac{\text{mean1} - \text{mean2}}{SP \sqrt{\frac{1}{m_1} + \frac{1}{m_2}}} \quad (7)$$

Since the combined t-test assume an equal variance for the two population from which the two sets of samples were drawn, the symbol "SP" stands for the combined standard deviation, which is the combined estimation of each of the variances of the samples. The possibility of ignoring a null hypothesis that is not true can increase if the populations' variances are not homogeneous and a combined t-test is employed, which is undesirable. When there are differences in the variances, the Behrens-Fisher's test can be used instead of the combined t-test.

$$s' = \frac{\text{mean1} - \text{mean2}}{\sqrt{\frac{\text{variance}_1}{m_1} + \frac{\text{variance}_2}{m_2}}} \quad (8)$$

The variances found in equation (6) correspond to the samples. The numbers of observations in samples 1 and 2, denoted by the symbols  $m_1$  and  $m_2$ , respectively. For both the combined t-test and a separate t-test, the two-tailed confidence intervals on the actual variation between the averages in the sample groups ( $\mu_1 - \mu_2$ ) are,

$$CI = (mean1 - mean2) \pm s(SP) \sqrt{\frac{1}{m_1} + \frac{1}{m_2}} \quad (9)$$

$$SP = \sqrt{\left\{ \frac{[(m_1-1)(variance1) + (m_2-1)(variance2)]}{(m_1+m_2-2)} \right\}} \quad (10)$$

$$CI = (mean1 - mean2) \pm s \sqrt{\frac{variance1}{m_1} + \frac{variance2}{m_2}} \quad (11)$$

Change " $\pm$ " to "+" or "-" for the lower or higher limit of a one-tailed test respectively

A paired t-test is the third variety of t-test. In contrast to the other two varieties, the paired t-test examines a single sample drawn from the population. A variable of interest is measured twice on the individuals in this sample: once prior to "treatment" and once following it. To put it another way, each acts as his control, which makes the data produced by this method more accurate. Similar twins are used in certain instances, where one is measured before receiving "treatment," and the other after. In the latter instance, the person may be required to take a psychological test as part of the "treatment."

The standard deviation and mean of the resulting differences ( $d_j$ ) are found by computing the variances between the readings "before" and "after" using the paired t-test. The t-values are,

$$s = \frac{\text{mean of the differences}}{SE} \quad (12)$$

### 3. Experimental Results

The results of the questionnaire used in the empirical investigation are reported below. The findings of the survey indicated that the quality characteristics were computed by taking into consideration the quantity of duration a certain quality attribute was mentioned. Following that, the attributes that were mentioned most frequently were selected to be included on the list of quality standards. The KM categorizes qualities into five distinct groups: "B," "N," "P," "J," and "S." The following characters stand for "attractive quality," "must-be quality," "one-dimensional quality," and "indifferent quality," respectively. "S" stands for "reverse quality." The findings of the present study place a priority on all quality characteristics, with the exception of reverse quality.

According to the findings, there are five components that contribute to an appealing quality: "shape," "Uniqueness," and other components of quality that really must be present: A component of quality with only one dimension, "quality assurance": "Quality" across all levels for each of the 13 components of graphic design in architectural design.

It is more apparent that a sufficient amount of attractive quality is present, which results in people's satisfaction; this suggests that graphic design created by a graphical designer possesses the appealing quality attribute with a high degree of reliability. The term "quality" refers to ensuring that products of collaborative art have as many indications of quality as is achievable. The level of quality and the degree to which one is satisfied appear to be one and the same dimension: as the quality is increased, the extent to which one is satisfied also increases. Because the "must-be quality" includes "Commemorative value," "quality assurance," and "local elements and features," it follows that the level of discontent will grow if the quality is lacking. People, therefore, take into account graphic design that incorporates regional components and traits, which highlights the variety between conventional approaches and graphic design. Other components are categorized as not significantly affecting customer satisfaction and exhibiting no difference in the quality of graphic design in architecture, either good or bad. This

outcome demonstrates that there is no reversal quality in the classification quality. Table 3 indicates the KM model for Adornment, Commemorative value, and Quality assurance (ACQ).

Table 3: Result of KM for ACQ

Element of graphic design in architecture	KM analysis				
	B (%)	P (%)	N (%)	J (%)	R (%)
Adornment	11.4	4.9	11.5	71.2	0
Commemorative value	11.4	17.8	40.5	30.8	0
Quality assurance	6.6	29.3	40.7	24.3	0

The majority of the components in Figures 3 and 4 and Tables 4 and 5 have positive qualities. In other words, when people acquire specific items that reflect local culture, sustainable development will not be a factor. Improvements in visual design quality increase consumer satisfaction, determined by the categorization of components as appealing, required, and one-dimensional. Furthermore, multiple benefits arise from distinct quality categories, allowing for optimal quality priority. For satisfied individuals, must-have features must be prioritized; "the attractive, one-dimensional quality" is also a key consideration. The information for the quality "Shape," must-be, and one-dimensional attributes, on the other hand, are quite close. Positive and negative statistics showed correlations of greater than fifty percent. This indicates that the satisfaction level shifts in either the direction toward or away from "one-dimensional quality." It also shows that "Architectural Shape" is more important than the others.

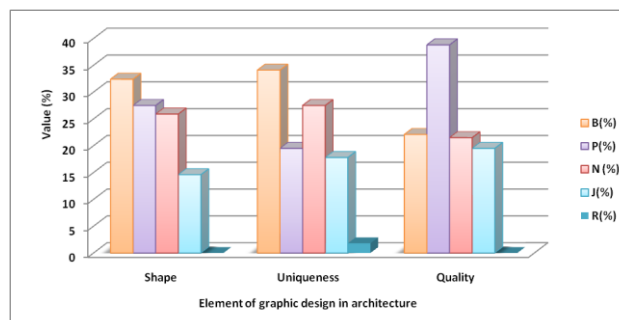


Figure 3: Result Of KM For Shape, Uniqueness, Quality

Table 4: KM Value for Shape, Uniqueness, Quality

Element of graphic design in architecture	KM analysis				
	B (%)	P (%)	N (%)	J (%)	R (%)
Shape	32.4	27.5	25.9	14.6	0
Uniqueness	34.1	19.5	27.5	17.8	1.8
Quality	22.1	38.8	21.5	19.5	0

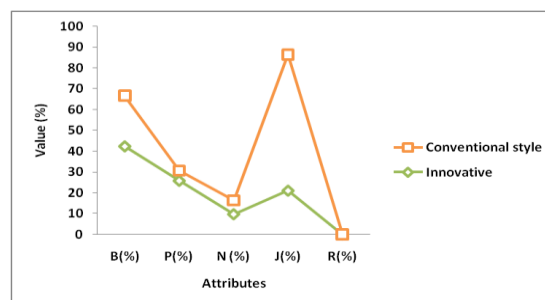


Figure 4: Result Of KM For Conventional Style and Innovative

Table 5: Result Value of KM For Conventional Style and Innovative

Element of graphic design in architecture	KM analysis				
	B(%)	P(%)	N (%)	J(%)	R(%)
Innovative	42.5	25.9	9.8	21.15	0
Conventional style	24.3	4.9	6.6	65.5	0

Figure 5 and Table 6 depict the usage of Architectural graphic design. Graphical requirements and design are both undifferentiated in Figure 4. This indicates that whether or not architecture is given with a graphical design has little impact on customer satisfaction or standard of quality. This is due to the majority of graphic design being utilized in architecture.

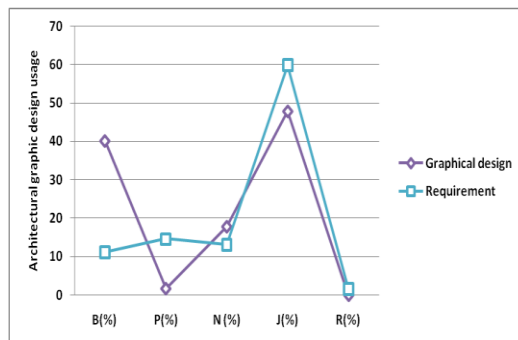


Figure 5: Usage Of Architectural Graphic Design

Table 6: Value Of Usage in Architectural Graphic Design

Element of graphic design in architecture	KM analysis				
	B (%)	P (%)	N (%)	J (%)	R (%)
Graphical design	40.1	1.7	17.8	47.8	0
Requirement	11.2	14.6	13.1	59.8	1.6

Figure 6 and Table 7 depict the completed usage. Local features and characteristics are necessary attributes in Figure 5, and the "traditional method" is a desirable trait. Conventional methods are used to create the highest quality graphic designs in construction. We created a variety of creative designs that correlate to the essential aspects of the growth of innovative architecture by utilizing local elements and features.

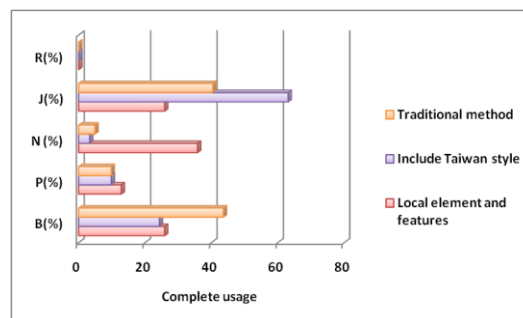


Figure 6: Outcome Of Complete Usage in Architectural Graphic Design

Table 7: Outcome Value of Complete Usage in Architectural Graphic Design

Element of graphic design in architecture	KM analysis				
	B(%)	P(%)	N (%)	J(%)	R(%)
Include Taiwan style	24.3	9.8	3.3	63.1	0
Traditional method	43.6	9.8	4.9	40.4	0
Local elements and features	11.4	4.9	11.5	71.2	0

Figure 7 depicts the satisfaction score for the element of graphic design in architecture. Figure 7 and KM analysis show the classification of elements used for graphic design in architecture. Elements such as shape, uniqueness, and traditional methods, innovative are classified as attractive. Graphical design requirements include Taiwan style; conventional style and adornment are classified as indifferent. Local elements and features, Commemorative value, and Quality assurance are classified as must be. Quality is classified as one-dimensional.

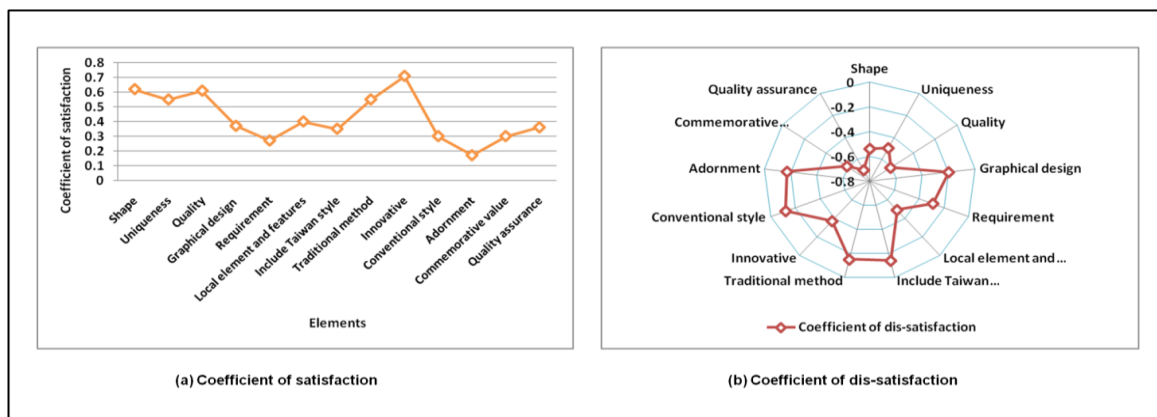


Figure 7: Coefficient Of Satisfaction and Dissatisfaction

#### 4. Conclusion

To sum up, the knowledge management system offers a valuable structure for comprehending contentment in the visual design of architecture environment art. Furthermore, the study offers insightful information about the essential graphic design qualities—clarity, simplicity, and visual appeal—that designers and architects ought to prioritize when producing architectural environment art. Architects and designers can meet the needs of their clients and produce superior architectural environment art by adding these qualities into their designs. This will increase customer satisfaction. All things considered, the KM may help designers and architects create designs that are centred on the needs of their clients and raise the standard of architecture environment art. Another drawback is that the study was conducted using a small sample size, which means it may not fully represent the total number of architects and designers. Larger-scale research could be done in the future to confirm the findings and provide more solid understanding of how KM is used to graphic arts in architectural environment art.

#### References

- [1] Bi, J.W., Liu, Y., Fan, ZP and Cambria, E., Modelling customer satisfaction from online reviews using ensemble neural network and effect-based Kano model. *International Journal of Production Research*, 2019, 57(22), pp.7068-7088.
- [2] Hamzah, M.H.I., Baharom, F. and Mohd, H., Constructing service-oriented architecture adoption maturity matrix using Kano model. In *AIP Conference Proceedings (Vol. 1891, No. 1, p. 020049)*. AIP Publishing LLC, 2017, October.
- [3] Lu, H. and Juan, Y.K., Applying The DQI-based Kano model and QFD to develop design strategies for visitor centers in national parks. *Architectural Engineering and Design Management*, 2021, pp.1-18.
- [4] Qiao, L. and Zhang, Y., Analysis of MOOC Quality Requirements for Landscape Architecture based on the KANO Model in the Context of the COVID-19 Epidemic. *Sustainability*, 2022, 14(23), p.15775.
- [5] Keyvanfar, A., Shafaghat, A. and Abd Majid, M.Z., Adaptive Behavior Satisfaction Index (ABSI) Framework for Assessing Energy Efficient Building Indoor Environment: Applying Kano Model. *International Journal of Civil Engineering*, 2022, 20(12), pp.1415-1429.

- [6] Ahmadi, H. B., S. H. H. Petrudi, and X. Wang. "Integrating Sustainability into Supplier Selection with Analytical Hierarchy Process and Improved Grey Relational Analysis: A Case of Telecom Industry." *The International Journal of Advanced Manufacturing Technology*, 2017, 90 (9–12): 2413–2427.
- [7] Jain, N. and Singh, A.R., Sustainable supplier selection criteria classification for Indian iron and steel industry: a fuzzy modified Kano model approach. *International Journal of Sustainable Engineering*, 2020, 13(1), pp.17-32.
- [8] Tingmin, Y. and Zihé, C., Research on User Experience Design of Traditional Culture App Based on Kano Model, 2023.
- [9] Chamilothoni, K., J. Wienold, and M. Andersen. "Adequacy of Immersive Virtual Reality for the Perception of Daylit Spaces: Comparison of Real and Virtual Environments." 2018 January.
- [10] Mouratidis, K. and Hassan, R., Contemporary versus traditional styles in architecture and public space: A virtual reality study with 360-degree videos. *Cities*, 2020, 97, p.102499.
- [11] Ceylan, S., Şahin, P., Seçmen, S., Somer, M.E. and Süher, K.H., An evaluation of online architectural design studios during COVID-19 outbreak. *Archnet-IJAR: International Journal of Architectural Research*, 2021, 15(1), pp.203-218.
- [12] Gobster, P.H., Ribe, R.G. and Palmer, J.F., Themes and trends in visual assessment research: Introduction to the Landscape and Urban Planning special collection on the visual assessment of landscapes. *Landscape and Urban Planning*, 2019, 191, p.103635.
- [13] Pistola, T., Georgakopoulou, N., Shvets, A., Chatzistavros, K., Xefteris, V.R., García, A.T., Koulalis, I., Diplaris, S., Wanner, L., Vrochidis, S. and Kompatsiaris, I., Imageability-based multi-modal analysis of urban environments for architects and artists. In *Image Analysis and Processing. ICIAP 2022 Workshops: ICIAP International Workshops, Lecce, Italy, May 23–27, 2022, Revised Selected Papers, Part I* (pp. 198-209). Cham: Springer International Publishing, 2022, August.
- [14] Leopold, Cornelia, Christopher Robeller, Ulrike Weber, and Beatrix Emo. "Why Evidence-Based Methods Are Useful for Architectural and Urban Design." *Research Culture in Architecture*, 2019, 173–182.
- [15] Liu, L., Silva, E.A., Wu, C. and Wang, H., A machine learning-based method for the large-scale evaluation of the qualities of the urban environment. *Computers, environment and urban systems*, 2017, 65, pp.113-125.
- [16] Pan, J., Structural Optimization of Architectural Environmental Art Design Based on Multiagent Simulation System. *Mathematical Problems in Engineering*, 2022.
- [17] Lee, E., Indoor environmental quality (IEQ) of LEED-certified home: Importance-performance analysis (IPA). *Building and environment*, 2019, 149, pp.571-581.
- [18] Geng, Y., Lin, B. and Zhu, Y., Comparative study on indoor environmental quality of green office buildings with different levels of energy use intensity. *Building and environment*, 2020, 168, p.106482.
- [19] Mediastika, C. and Lie, K., Occupants' perception on green-rated office building in Surabaya, Indonesia. *Procedia engineering*, 2015, 118, pp.546-553
- [20] Schiavon, S. and Altomonte, S., Influence of factors unrelated to environmental quality on occupant satisfaction in LEED and non-LEED certified buildings. *Building and Environment*, 77. pp. 148-159. ISSN 1873-684X.
- [21] MacNaughton, P., Satish, U., Laurent, J.G.C., Flanigan, S., Vallarino, J., Coull, B., Spengler, J.D. and Allen, J.G., The impact of working in a green certified building on cognitive function and health. *Building and environment*, 2017, 114, pp.178-186.